WO 03/107019

PCT/GB03/02599

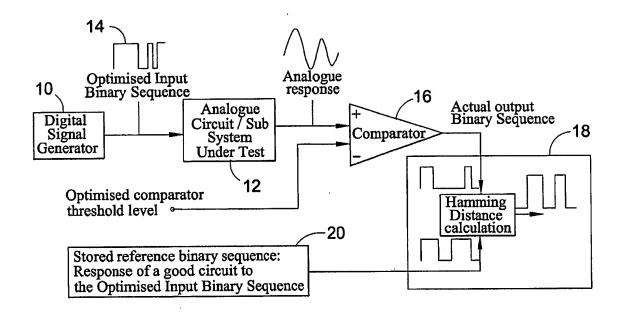


Fig.1

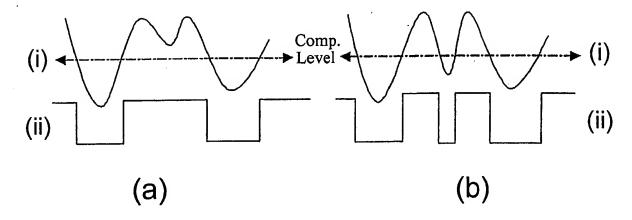


Fig.2

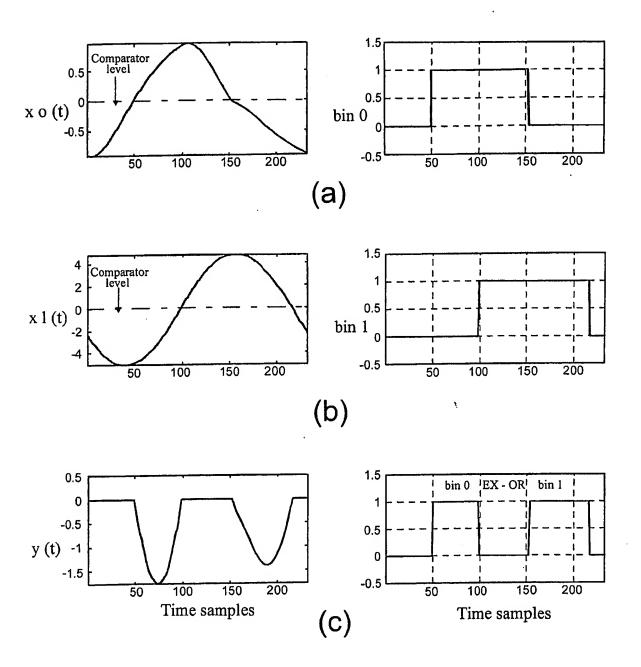


Fig.3

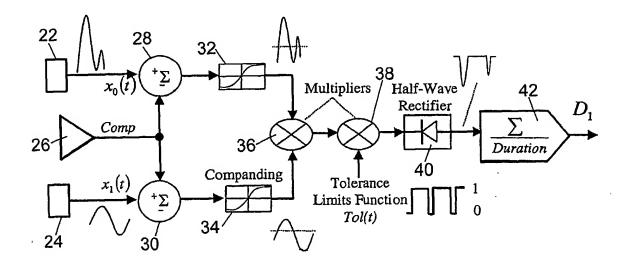


Fig.4

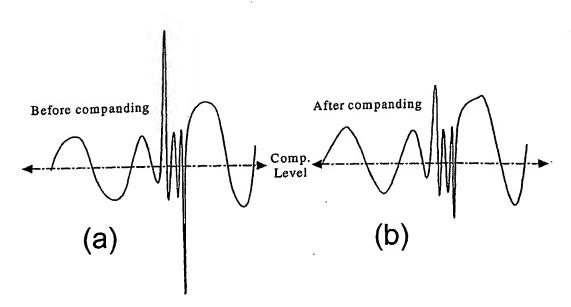


Fig.5


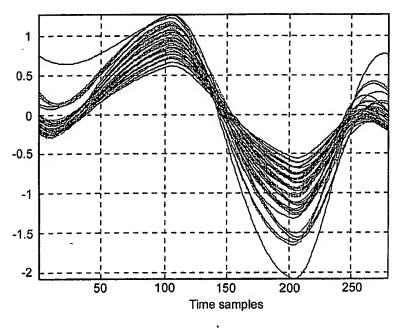


Fig.6



4/13

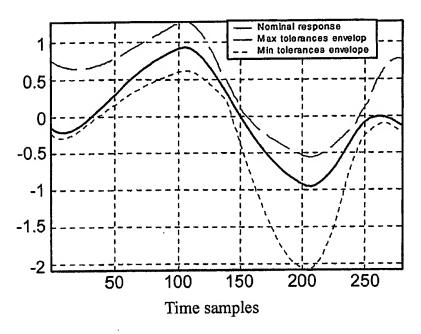


Fig.8

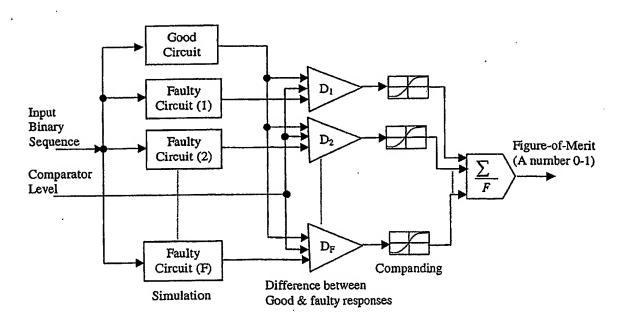


Fig.9

5/13

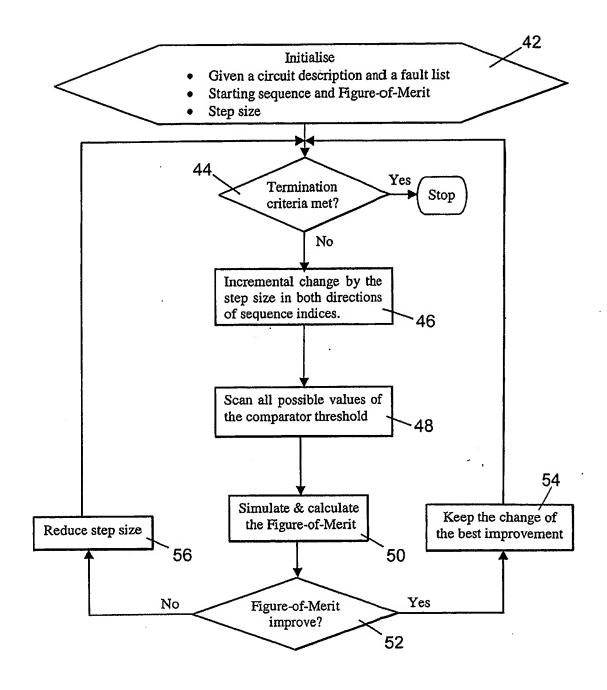


Fig.10

WO 03/107019

PCT/GB03/02599



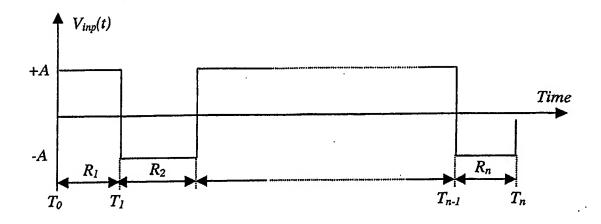


Fig.11

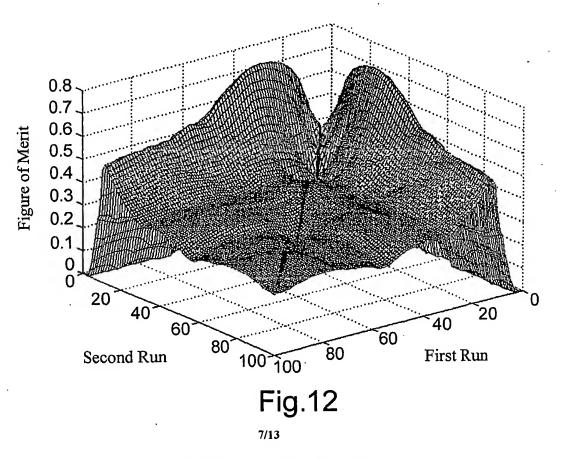

SUBSTITUTE SHEET (RULE 26)

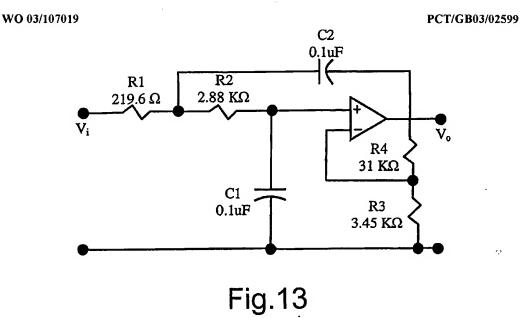

. . . .

40 20 0 -20 -40 10³ (a) 40 20 Gain. dB 0 -20 -40 (b) 10³ 40 20 0 -20 -40 (c) Frequency, Hz

Fig.14

: 1

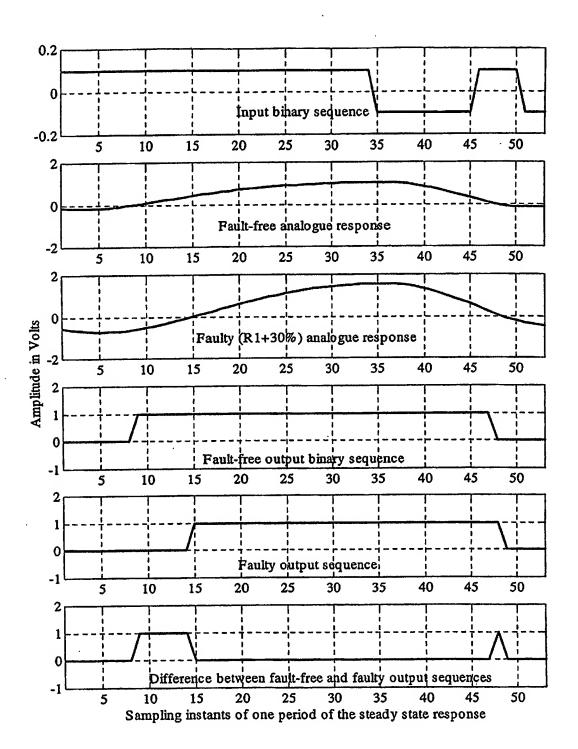


Fig.15

9/13

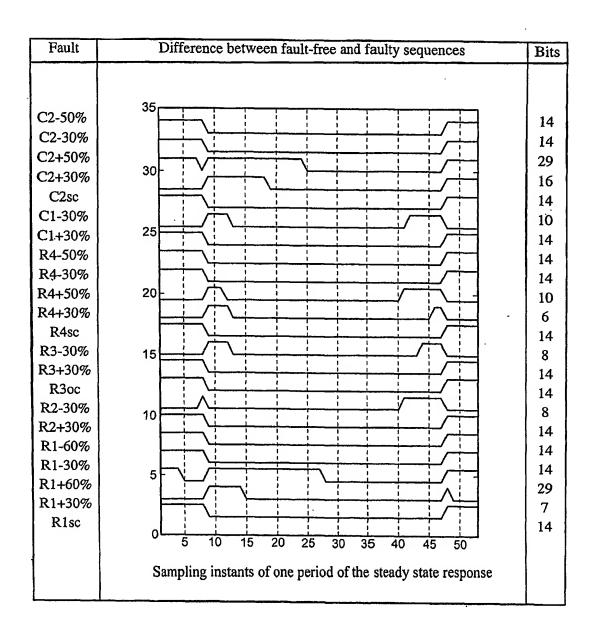


Fig.16



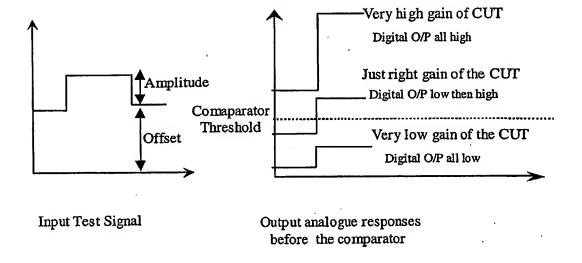


Fig.17

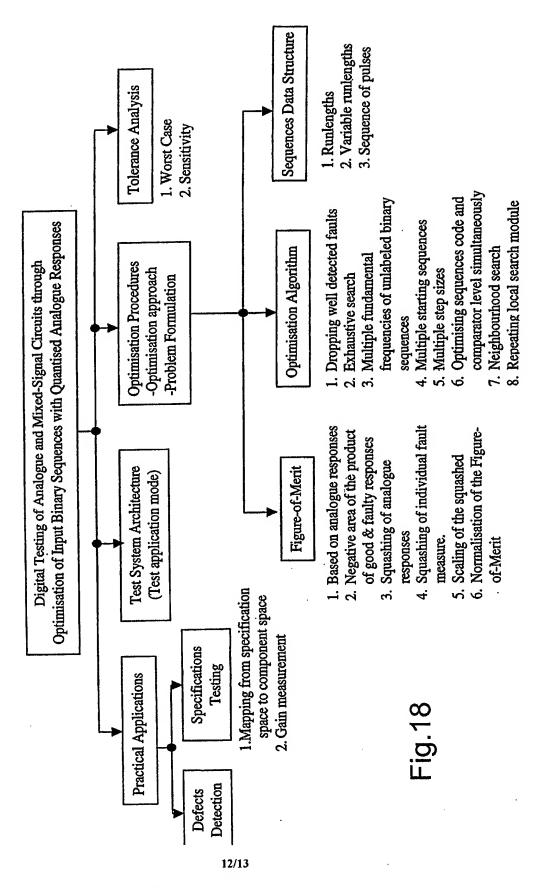

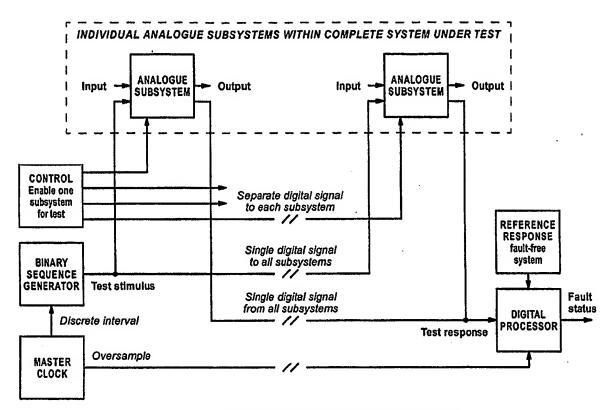

Architecture of overall system under test

Fig.19